

**UNITED NATIONS / DOT  
PERFORMANCE CERTIFICATION**



**4G PERIODIC RETEST**

**4 x 1 Gallon Round Plastic Bottle with Two Case  
Sealing Mechanisms:  
#1) Taped Top Flaps & Taped Bottom Flaps  
#2) Taped Top Flaps & Glued Bottom Flaps**

**TEST REPORT #: 19-CA20123**



4G / Y23.5 / S / \*\*  
USA / +CC7715

\*\*Insert the year packaging is manufactured

**TESTING PERFORMED FOR:**

**PUREPAK TECHNOLOGY CORPORATION**

324 South Bracken Lane, Suite 3  
Chandler, AZ 85224

**ATTN: Michael Dodd**

**TESTING PERFORMED BY:**

**TEN-E PACKAGING SERVICES, INC.**

326 North Corona Avenue  
Ontario, CA 91764  
Phone: 909-937-1260  
Fax: 909-937-1262

July 3, 2019

## TABLE OF CONTENTS

<b>SECTION I: CERTIFICATION .....</b>	<b>3#</b>
<b>SECTIONS II &amp; V: PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS .....</b>	<b>4#</b>
COMPONENT INFORMATION .....	5#
<b>SECTION III: TEST PROCEDURES AND RESULTS.....</b>	<b>7#</b>
DROP TESTS#    #1) Taped Top Flaps & Taped Bottom Flaps.....	7#
DROP TESTS#    #2) Taped Top Flaps & Glued Bottom Flaps .....	8#
STACKING TEST# #1) Taped Top Flaps & Taped Bottom Flaps .....	9#
STACKING TEST# #2) Taped Top Flaps & Glued Bottom Flaps.....	10#
PRESSURE DIFFERENTIAL TEST .....	11#
VIBRATION TEST# #1) Taped Top Flaps & Taped Bottom Flaps .....	12#
VIBRATION TEST# #2) Taped Top Flaps & Glued Bottom Flaps.....	13#
COBB WATER ABSORPTION TEST .....	14#
<b>REGULATORY AND INDUSTRY STANDARD REFERENCES .....</b>	<b>15#</b>
<b>SECTION IV: MATHEMATICAL CALCULATIONS .....</b>	<b>16#</b>

4 x 1 Gallon Round Plastic Bottle Packaging – Case Sealing Mechanism Variables		
Option #	Top Flaps	Bottom Flaps
1	2" 3M Scotch Brand Tape	2" 3M Scotch Brand Tape
2	2" 3M Scotch Brand Tape	Hot Melt Adhesive

## SECTION I: CERTIFICATION


### Periodic Retest of the PurePak Technology Corporation

#### 4 x 1 Gallon Round Plastic Bottle with Two Case Sealing Mechanisms:

#### #1) Taped Top Flaps & Taped Bottom Flaps #2) Taped Top Flaps & Glued Bottom Flaps

**TEN-E Packaging Services, Inc.** is a current DOT UN Third-Party Certification Agency under §107.403 and certifies that the **PurePak Technology Corporation** packaging referenced above has passed the standards of the DEPARTMENT OF TRANSPORTATION'S TITLE 49 CFR; Performance Oriented Packaging Standards, Section 178. This package is also certified under IMDG, ICAO/IATA Regulations and the UN Recommendations on the Transport of Dangerous Goods. It is the responsibility of the end user to determine authorization for use under these regulations. The use of other packaging methods or components other than those documented in this report may render this certification invalid.

### SUMMARY OF PERFORMANCE TESTS

UN / DOT TEST	CFR REFERENCE	TEST LEVEL	TEST CONTENTS	TEST COMPLETED	TEST RESULTS
Drop	178.603	1.5 m	Methanol/Water Solution	June 28, 2019	PASS
Stacking (#1)	178.606	204.1 Kg – 24 Hours	Empty	July 1, 2019	PASS
Stacking (#2)	178.606	204.1 Kg – 24 Hours	Empty	July 2, 2019	PASS
Pressure	173.27	95 kPa - 30 Minutes	Water	July 1, 2019	PASS
Vibration	178.608	3.4 Hz – 1 Hour	Water	July 3, 2019	PASS
Cobb	178.516	30 Minutes	---	July 3, 2019	PASS
<b>TEST REPORT NUMBER(S):</b>			19-CA20123, 17-CA20102		
<b>UN MARKING:</b> (CFR 49 – 178.503)			 4G / Y23.5 / S / ** USA / +CC7715		
<b>PACKAGING IDENTIFICATION CODE:</b>			4G - Fiberboard Box (178.516)		
<b>PERFORMANCE STANDARD:</b>			Y (Packaging meets Packing Group II and III tests)		
<b>AUTHORIZED GROSS MASS:</b>			23.5 Kg (51.8 Lbs.)		
<b>"S" DESIGNATION:</b>			Denotes Inner Packagings		
<b>YEAR OF MANUFACTURE:</b>			** Insert year the packaging is manufactured		
<b>STATE AUTHORIZING THE MARK:</b>			USA		
<b>PACKAGING CERTIFICATION AGENCY:</b>			(+CC) TEN-E Packaging Services, Inc. (Ontario, CA CAA #2006030021)		
<b>THIRD PARTY PACKAGING IDENTIFICATION:</b>			+CC7715		
<b>PERIODIC RETEST DATE:</b>			July 3, 2021		

ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY THAT THE PACKAGING TESTED IS MERCHANTABLE OR FIT FOR A PARTICULAR PURPOSE, ARE DISCLAIMED. In no event shall TEN-E Packaging Services, Inc. liability exceed the total amount paid by **PurePak Technology Corporations** for services rendered. In the event of future changes to the above referenced test standards, it is the responsibility of **PurePak Technology Corporations** to determine whether additional testing or updating of past testing is necessary to verify that the packaging we have tested remains in compliance with those standards.

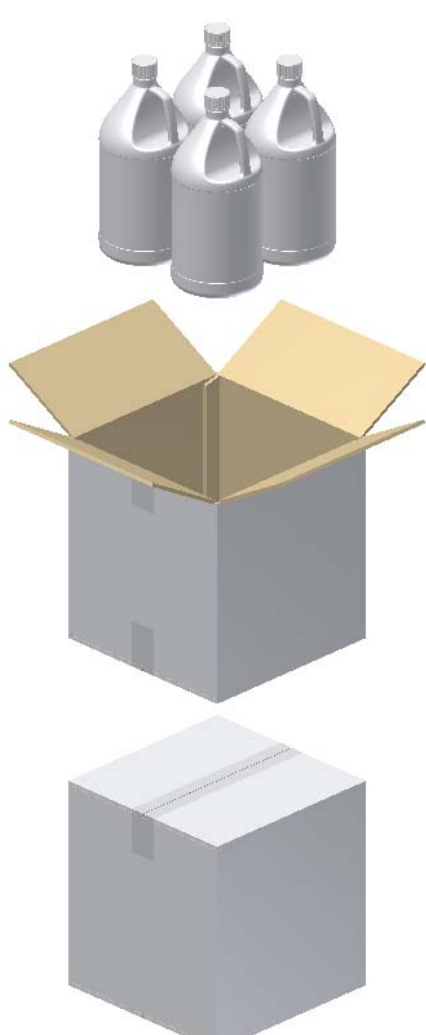
#### MANUFACTURER:

**PurePak Technology Corporations**  
324 South Bracken Lane Suite 3  
Chandler, AZ 85224

  
 Matthew C. Anderson  
 Project Manager  
 TEN-E Packaging Services, Inc.  
 326 North Corona Avenue  
 Ontario, CA 91764

## SECTIONS II & V: PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS

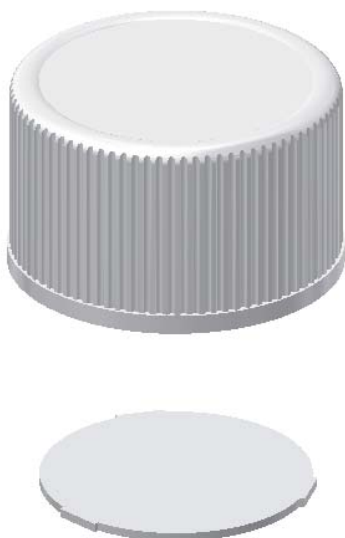

### 4 x 1 Gallon Round Plastic Bottle with Two Case Sealing Mechanisms: #1) Taped Top Flaps & Taped Bottom Flaps #2) Taped Top Flaps & Glued Bottom Flaps

ASSEMBLY DRAWING	TEST LEVELS	
	Certification Type:	Periodic Retest
	Packaging Code Designation:	4G
	Packing Group:	II
	Specific Gravity:	1.5
	Internal Pressure:	95 kPa
	<b>TEST SAMPLE PREPARATION</b> (Refer to Section IV)	
	Overall Packaging Tare Weight:	1,381.0 Grams
	Fill Capacity (98% Maximum Capacity):	
	Methanol/Water Solution	3,770.2 Grams
	Water	3,882.8 Grams
	Package Test Weight:	
	Methanol/Water Solution	16.4 Kg      36.1 Lbs.
	Water	16.9 Kg      37.2 Lbs.
	Authorized Package Gross Mass:	24.6 Kg      54.2 Lbs.
	<b>CLOSING METHODS – INNER PACKAGING</b>	
	Application Torque:	50 In-Lbs.
	Equipment:	Kaps All Electronic Torque Tester #W701
	<b>CLOSING METHODS – SHIPPER</b>	
	<b>Top Flaps:</b>	
	Manufacturer:	3M, St. Paul, MN
	Type:	3M #34508 Pressure Sensitive Tape
	Width:	48 mm (2")
	Overlap:	2" Minimum
	Tape Pattern:	Center Seam
	<b>Bottom Flaps:</b>	
	Tape Manufacturer:	3M, St. Paul, MN
	Type:	Option #1) 3M #34508 Pressure Sensitive Tape Option #2) Hot Melt Adhesive (Prepared by Client as for Transport) (Three Strips of Thermoset Adhesive – 1/2" x 4")
	Tape Width:	48 mm (2")
	Tape Overlap:	2" Minimum
	Tape Pattern:	Center Seam

#### For Packagings with an Established Gross Mass:

If the gross mass calculation in this report exceeds the previously established gross mass, the manufacturer may elect to maintain the current gross mass marking (e.g. the gross mass rating of the UN marking on the packaging may be less than the calculated gross mass indicated in this report) or use the newly established gross mass. In no event shall the gross mass marking on the packaging exceed the gross mass to which the packaging was tested.

## COMPONENT INFORMATION

CLOSURE (QIM-317-4937)		DRAWING
Manufacturer: Rexam Plastic Packaging, Evansville, IN		
Description:	38mm Threaded Closure	
Quantity:	4	
Material:	Polypropylene	
Tare Weight:	10.45 Grams	
Overall Dimensions:		
• Height	1.016" ± 0.015"	
• Diameter	1.701" ± 0.015"	
Thread:		
• Type	38mm	
• Style	439	
Finish Dimensions:		
• T	1.483" ± 0.007"	
• E	1.389" ± 0.007"	
Markings (QC Audit):	30	
Liner:		
Description:	Polyethylene Foam Liner	
Tare Weight:	0.66 Grams	
Thickness:	0.049"	
Diameter:	1.388"	
PLASTIC BOTTLE (B38RD1HA)		DRAWING
Manufacturer: PurePak Technology Corporation, Chandler, AZ		
Description:	1 Gallon Round Plastic Bottle	
Quantity:	4	
Material:	High Density Polyethylene	
Method of Manufacture:	Blow Molded	
Tare Weight:	150.0 Grams ± 6.0 Grams	
Capacity:		
• Rated	1 Gallon	
• Overflow	3,962.0.0 Grams (1.0 Gallons)	
Overall Dimensions:		
• Height	12.350" ± 0.090"	
• Diameter	6.072" ± 0.080"	
Thread Dimensions:		
• T	1.461" ± 0.015"	
• E	1.367" ± 0.015"	
Wall Thickness:		
• Minimum	0.020"	
Markings (QC Audit):	SPI "2" HDPE Recycling Symbol BERRY PLASTICS C168-1 3 6/19	





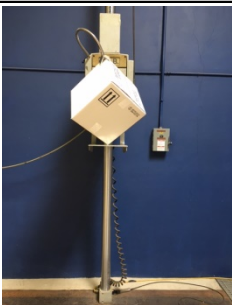

SHIPPER (731197 & 830600)		
<b>Manufacturer: Packaging Corporation of America, Phoenix, AZ</b>		
<b>Description:</b>	Regular Slotted Container	
<b>Material/Flute (Inner to Outer):</b>	Double Wall Mottled White Corrugated Fiberboard; C/B-Flute	
<b>Basis Weight (Outer to Inner) Lbs./MSF:</b>		
• <b>Specification</b>	42 / 23 / 35 / 23 / 35	
<b>Tare Weight:</b>	739.0 Grams	
DIMENSIONS		
	Specification Dimensions (Inside)	Measured Dimensions (Outside)
• <b>Length</b>	12.3125"	13-3/8"
• <b>Width</b>	12.3125"	13-3/8"
• <b>Height</b>	12.625"	14"
<b>Board Caliper (Nominal):</b>	0.254"	
<b>Manufacturer's Joint:</b>	Inside Glued, 1-1/2" Lap	
<b>Markings (QC Audit):</b>	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; border-radius: 50%; padding: 2px; margin-right: 10px;">u n</div> <div> 4G/Y23.5/S/19  USA/+CC7715    HANDLE WITH CARE THIS SIDE UP ARTWORK DATE 02/27/19  12.3125X12.3125X12.625 ID 87341 </div> </div>	
BOX CERTIFICATE		
<b>(A) Corrugated Manufacturer:</b>	PACKAGING CORPORATION OF AMERICA	
<b>(B) Structure:</b>	Double Wall	
<b>(C) ECT:</b>	51 Lbs. Per Sq. Inch	
<b>(D) Size Limit:</b>	105"	
<b>(E) Gross Wt. Lt:</b>	120 Lbs.	
<b>(F) Location:</b>	PHOENIX, AZ	

### SECTION III: TEST PROCEDURES AND RESULTS

#### DROP TESTS #1) Taped Top Flaps & Taped Bottom Flaps

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Methanol/Water Solution (0.971 SG)	<ul style="list-style-type: none"> <li>For packaging containing liquid, each packaging does not leak.</li> <li>There can be no damage to the outer packaging likely to adversely affect safety during transport. Inner receptacles, inner packagings or articles must remain completely within the outer packaging and there must be no leakage of the filling substance from the inner packaging.</li> <li>Any discharge from a closure is slight and ceases immediately after impact with no further leakage. (\$178.603)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	-18°C (0°F) Freezer #W201	
<b>CONTENTS TEMP.:</b>	-19.1°C (-2.3°F)	
<b>DROP HEIGHT:</b>	1.5 Meters (60.0") (Refer to Section IV)	
<b>TEST EQUIPMENT:</b>	L.A.B. Accu Drop 160	

#### DROP ORIENTATIONS AND TEST RESULTS

Sample #1: Flat on Bottom	Sample #2: Flat on Top	*Sample #3: Flat on Long Side
		
<b>PASS:</b> No leakage or damage.	<b>PASS:</b> No leakage or damage.	<b>PASS:</b> No leakage or damage.
*Sample #4: Flat on Short Side	*Sample #5: Bottom Corner	**Sample #1: Top Corner
		
<b>PASS:</b> No leakage or damage.	<b>PASS:</b> No leakage. Deformation to shipper on impact corner.	<b>PASS:</b> No leakage. Deformation to shipper on impact corner.







\*Side and corner drops were conducted to impact the manufacturer's joint.

\*\*Flat on bottom drop sample was also used for the top corner drop.



**DROP TESTS**

**#2) Taped Top Flaps & Glued Bottom Flaps**

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Methanol/Water Solution (0.971 SG)	<ul style="list-style-type: none"><li>For packaging containing liquid, each packaging does not leak.</li><li>There can be no damage to the outer packaging likely to adversely affect safety during transport. Inner receptacles, inner packagings or articles must remain completely within the outer packaging and there must be no leakage of the filling substance from the inner packaging.</li><li>Any discharge from a closure is slight and ceases immediately after impact with no further leakage. (§178.603)</li></ul>
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	-18°C (0°F) Freezer #W201	
CONTENTS TEMP.:	-19.1°C (-2.3°F)	
DROP HEIGHT:	1.5 Meters (60.0") (Refer to Section IV)	
TEST EQUIPMENT:	L.A.B. Accu Drop 160	
DROP ORIENTATIONS AND TEST RESULTS		
Sample #12: Flat on Bottom	Sample #13: Flat on Top	*Sample #14: Flat on Long Side
		
PASS: No leakage or damage.	PASS: No leakage or damage.	PASS: No leakage or damage.
*Sample #15: Flat on Short Side	*Sample #16: Bottom Corner	**Sample #12: Top Corner
		
PASS: No leakage or damage.	PASS: No leakage. Deformation to shipper on impact corner.	PASS: No leakage. Deformation to shipper on impact corner.

\*Side and corner drops were conducted to impact the manufacturer's joint.

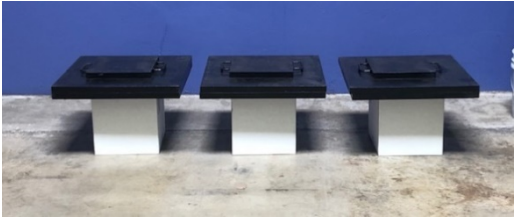
\*\*Flat on bottom drop sample was also used for the top corner drop.



**STACKING TEST #1) Taped Top Flaps & Taped Bottom Flaps**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Empty	<ul style="list-style-type: none"> <li>There can be no deterioration that could adversely affect transport safety or any distortion liable to reduce the package's strength, cause instability in stacks of packages, or cause damage to inner packagings that is likely to reduce safety in transport.</li> </ul> <p>(§178.606)</p>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TEST LOAD APPLIED:</b>	204.1 Kg (450.0 Lbs.) (Refer to Section IV)	
<b>TEST DURATION:</b>	24 Hours	
<b>TEST EQUIPMENT:</b>	Dead Load Weights	

**STACKING TEST SET-UP & RESULTS**

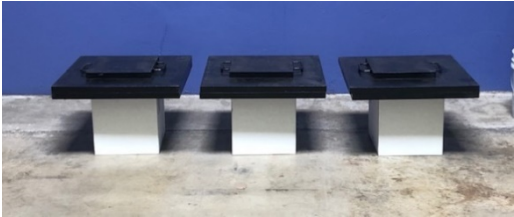
	Sample #	Maximum Deflection After 24 Hours	Results
	6	0"	PASS
	7	0"	PASS
	8	1/16"	PASS
<b>Comments/Observations:</b> Following the 24-hour stack test, there was no damage likely to affect the performance of the packaging.			

**Stacking Stability:** Not conducted; required only for guided load tests.

**STACKING TEST #2) Taped Top Flaps & Glued Bottom Flaps**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Empty	<ul style="list-style-type: none"> <li>There can be no deterioration that could adversely affect transport safety or any distortion liable to reduce the package's strength, cause instability in stacks of packages, or cause damage to inner packagings that is likely to reduce safety in transport.</li> </ul> <p>(§178.606)</p>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TEST LOAD APPLIED:</b>	204.1 Kg (450.0 Lbs.) (Refer to Section IV)	
<b>TEST DURATION:</b>	24 Hours	
<b>TEST EQUIPMENT:</b>	Dead Load Weights	

**STACKING TEST SET-UP & RESULTS**

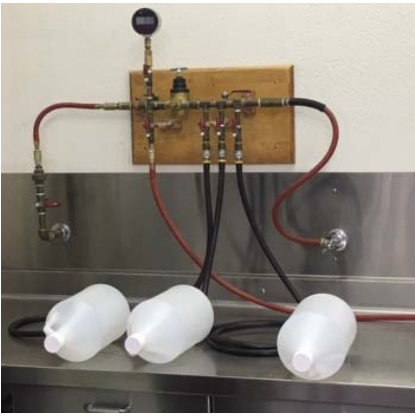
	Sample #	Maximum Deflection After 24 Hours	Results
	6	0"	PASS
	7	1/16"	PASS
	8	0"	PASS
<b>Comments/Observations:</b> Following the 24-hour stack test, there was no damage likely to affect the performance of the packaging.			

**Stacking Stability:** Not conducted; required only for guided load tests.

## PRESSURE DIFFERENTIAL TEST

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>Packaging for which retention of liquid is a basic function must be capable of withstanding the pressure requirements without leakage. (§173.27(c))</li> </ul>
<b>FILL CAPACITY:</b>	Maximum Capacity	
<b>CLOSURE APPLICATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TEST PRESSURE:</b>	95 kPa	
<b>TEST DURATION:</b>	30 Minutes	
<b>AREA OF PRESSURIZATION:</b>	Through the Bottom	
<b>TEST EQUIPMENT:</b>	Regulated Water Source Digital Pressure Gauge #: 605	

## HYDROSTATIC PRESSURE TEST SET-UP AND RESULTS


	Sample #	Results	Comments/Observations
	1	PASS	All three samples maintained the 95 kPa test pressure for 30 minutes without leakage.
	2	PASS	
	3	PASS	

**VIBRATION TEST**

**#1) Taped Top Flaps & Taped Bottom Flaps**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>Immediately following the period of vibration, each package must be removed from the platform, turned on its side and observed for any evidence of leakage.</li> <li>A packaging passes the vibration test if there is no rupture or leakage from any of the packages.</li> <li>No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength. (§178.608)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TABLE DISPLACEMENT:</b>	1"	
<b>TEST FREQUENCY:</b>	3.4 Hz	
<b>TEST DURATION:</b>	1 Hour	
<b>TEST EQUIPMENT:</b>	Vertical motion using L.A.B. Palletizer Vibration System	


**VIBRATION TEST SET-UP AND RESULTS**

	Sample #	Results	Comments/Observations
	9	PASS	No leakage or damage.
	10	PASS	
	11	PASS	

**VIBRATION TEST #2) Taped Top Flaps & Glued Bottom Flaps**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>Immediately following the period of vibration, each package must be removed from the platform, turned on its side and observed for any evidence of leakage.</li> <li>A packaging passes the vibration test if there is no rupture or leakage from any of the packages.</li> <li>No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength. (§178.608)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TABLE DISPLACEMENT:</b>	1"	
<b>TEST FREQUENCY:</b>	3.4 Hz	
<b>TEST DURATION:</b>	1 Hour	
<b>TEST EQUIPMENT:</b>	Vertical motion using L.A.B. Palletizer Vibration System	

**VIBRATION TEST SET-UP AND RESULTS**

	Sample #	Results	Comments/Observations
	17	PASS	No leakage or damage.
	18	PASS	
	19	PASS	

## COBB WATER ABSORPTION TEST

TEST INFORMATION	TEST CRITERIA
<b>NUMBER OF SAMPLES:</b> 5 <b>SAMPLE SIZE:</b> 5" x 5" (Minimum) <b>CONDITIONING:</b> 73°F / 50% RH Quality Room #W202 <b>WATER APPLIED:</b> 100 mL / Sample <b>TEST DURATION:</b> 30 Minutes / Sample <b>TEST EQUIPMENT:</b> UWE Analytical Balance Gurley Cobb Water Absorption Fixtures	<ul style="list-style-type: none"> <li>An increase in mass greater than 155 g/m<sup>2</sup> over the 30 minute duration represents an unacceptable level of water resistance. (§178.516)</li> </ul>

COBB WATER ABSORPTION TEST RESULTS	
Sample #	Water Absorbed
1	136.0 g/m <sup>2</sup>
2	141.0 g/m <sup>2</sup>
3	131.0 g/m <sup>2</sup>
4	141.0 g/m <sup>2</sup>
5	129.0 g/m <sup>2</sup>
<b>AVERAGE:</b>	<b>135.6 g/m<sup>2</sup></b>
<b>RESULT</b>	<b>PASS</b>

## REGULATORY AND INDUSTRY STANDARD REFERENCES

### REGULATORY REFERENCES

TEST	49 CFR <sup>①</sup>	UN <sup>②</sup>	IMDG <sup>③</sup>	ICAO <sup>④</sup>	IATA <sup>⑤</sup>
	October 2018 Edition	20 <sup>th</sup> Edition	2018 Edition	2019-2020 Edition	60 <sup>th</sup> Edition
<b>Drop:</b>	178.603	6.1.5.3	6.1.5.3	6; 4.3	6.3.3
<b>Stacking:</b>	178.606	6.1.5.6	6.1.5.6	6; 4.6	6.3.6
<b>Pressure:</b>	173.27(c)	4.1.1.4.1	---	4; 1.1.6	5.0.2.9
<b>Vibration:</b>	178.608	---	---	4; 1.1.1 & 4; 1.1.4	5.0.2.7
<b>Cobb:</b>	178.516(b)(1)	6.1.4.12.1	6.1.4.12.1	6; 3.1.11.1	6.2.12.2

① United States Department of Transportation Code of Federal Regulations (CFR) Title 49, Transportation, Parts 100-185

② The United Nations Recommendations on the Transport of Dangerous Goods – Model Regulations (UN – Orange Book)

③ International Maritime Dangerous Goods Code (IMDG)

④ Technical Instructions for the Safe Transport of Dangerous Goods by Air (ICAO)

⑤ International Air Transport Association (IATA) Dangerous Goods Regulations

### INDUSTRY STANDARD REFERENCES

<b>Drop:</b>	ASTM <sup>⑥</sup> D5276:	Standard Test Method for Drop Test of Loaded Containers by Free Fall
	ASTM <sup>⑥</sup> D7790	Standard Test Method for the Preparation of Plastic Packagings Containing Liquids for United Nations (UN) Drop Testing
	ISO <sup>⑦</sup> 2248:	Packaging – Complete, Filled Transport Packages – Vertical Impact Test by Dropping
<b>Stacking:</b>	ASTM <sup>⑥</sup> D4577:	Standard Test Method for Compression Resistance of a Container Under Constant Load
	ISO <sup>⑦</sup> 2234:	Packaging – Complete, Filled Transport Packages – Stacking Test using Static Load
<b>Hydrostatic Pressure:</b>	ASTM <sup>⑥</sup> D7660:	Standard Guide for Conducting Internal Pressure Tests on United Nations (UN) Packagings
<b>Vibration:</b>	ASTM <sup>⑥</sup> D999:	Standard Test Method for Vibration Testing of Shipping Containers
	ISO <sup>⑦</sup> 2247:	Packaging – Complete, Filled Transport Packages – Vibration Test at Fixed Low Frequency
<b>Cobb:</b>	ISO <sup>⑦</sup> 535:	Paper and Board – Determination of Water Absorption – Cobb Method

⑥ American Society for Testing and Materials (ASTM)

⑦ International Organization for Standardization (ISO)

### EQUIPMENT

All inspection, measuring and test equipment that can affect product quality is calibrated and adjusted at prescribed intervals, or prior to use, and is traceable to NIST, using ANSI Z540 as an overall guide for calibration certification.



## SECTION IV: MATHEMATICAL CALCULATIONS

### INFORMATION USED FOR CALCULATIONS

Overall Packaging Tare Weight (PTW):	1,381.0 Grams	
Overflow Capacity (OFC):		Methanol/Water
Methanol/Water	3,847.1 Grams	SG: 0.971
Water	3,962.0 Grams	
Number of Inner Packagings (# IP):	4	
Packing Group	II	
Product Specific Gravity (PSG):	1.500	
Packing Group Multiplication Factor (MF):	1.00	
Overall Height of one Package (OH):	14.00 Inches	
Stack Test-# of Samples Tested Simultaneously:	1	

### 98% OF OVERFLOW

Overflow Capacity (OFC) x 98%

OFC	x	98%		
3,847.1	x	98% =	3,770.2 Grams	Methanol/Water
3,962.0	x	98% =	3,882.8 Grams	Water

### PACKAGE TEST WEIGHTS

Overall Pkg Tare Weight (PTW) + (98% Overflow Capacity (OFC) x # of Inner Pkg (# IP))

PTW	+	(98% OFC	x	# IP)	
1,381	+	3,770.2	x	4	Methanol/Water
1,381	+	3,882.8	x	4	Water
Methanol/Water:		16.4	Kg	36.1	Lbs.
Water:		16.9	Kg	37.2	Lbs.

### AUTHORIZED PACKAGE GROSS MASS CALCULATION (APGM)

Overall Pkg Tare Weight (PTW) + (Product SG (PSG) x 98% Overflow (OFC) x # of Inner Pkg (# IP))

PTW	+	(PSG	x	98% OFC	x	# IP)
1,381	+	1.5	x	3,883	x	4
		24.6	Kg	54.2	Lbs.	

#### DROP HEIGHT

Calculation For Product Specific Gravities Exceeding 1.2  
Product Specific Gravity (PSG) x Packing Group Multiplication Factor (MF)

PSG	x	MF		Packing Group: II	
1.5	x	1.00			
		1.50	Meter	Required Drop Height	Actual Drop Height
				59.1 Inches	60 Inches

#### STACKING TEST MINIMUM LOAD CALCULATIONS

Number of Packages in a 3m High Stack (118 / Overall Pkg Height (OH) -1)

118 / Overall Height of one Pkg (OH) - 1

(118)	/	(OH)	-1	=	# 3m HS
118	/	14.00	-1	=	7.5

Stacking Test Load Calculation (Individual Package)

Authorized Pkg Gross Mass (APGM) x # of Pkg in a 3m High Stack (# 3m HS)

APGM	x	# 3m HS	
24.6	x	7.5	
			184.5 Kg      406.7 Lbs.