

**UNITED NATIONS / DOT
PERFORMANCE CERTIFICATION**



4G PERIODIC RETEST

**6 x 500 mL Round Plastic Bottle Packaging with
Two Neck Finishes**

TEST REPORT #: 20-CA20150



4G / Y7.5 / S / **
USA / +CC7197

**Insert the year packaging is manufactured

TESTING PERFORMED FOR:

PUREPAK TECHNOLOGY CORPORATION

324 South Bracken Lane Suite 3
Chandler, AZ 85224

ATTN: Michael Dodd

TESTING PERFORMED BY:

TEN-E PACKAGING SERVICES, INC.

326 North Corona Avenue
Ontario, CA 91764
Phone: 909-937-1260
Fax: 909-937-1262

September 2, 2020

TABLE OF CONTENTS

SECTION I: CERTIFICATION	3#
SECTIONS II & V: PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS	4#
COMPONENT INFORMATION	6#
SECTION III: TEST PROCEDURES AND RESULTS	9#
DROP TESTS# 38-439 Neck Finish	9#
DROP TESTS# 45mm Neck Finish	10#
STACKING TEST	11#
PRESSURE DIFFERENTIAL TEST# 38-439 Neck Finish	12#
PRESSURE DIFFERENTIAL TEST# 45mm Neck Finish	13#
VIBRATION TEST# 38-439 Neck Finish	14#
VIBRATION TEST# 45mm Neck Finish	15#
COBB WATER ABSORPTION TEST	16#
REGULATORY AND INDUSTRY STANDARD REFERENCES	17#
SECTION IV: MATHEMATICAL CALCULATIONS	18#

NOTES AND COMMENTS

6 x 500 mL Round Plastic Bottle Packaging with Two Neck Finishes:

#1) 38-439 Neck Finish


#2) 45mm Neck Finish

This package uses special permit DOT-SP 14656 which authorizes the manufacture, mark, sale and use of non-DOT specification combination packaging for the transportation in commerce of the materials authorized by this special permit.

SECTION I: CERTIFICATION

Periodic Retest of the PurePak Technology Corporation 6 x 500 mL Round Plastic Bottle Packaging with Two Neck Finishes: #1) 38-439 Neck Finish & #2) 45mm Neck Finish

TEN-E Packaging Services, Inc. is a current DOT UN Third-Party Certification Agency under §107.403 and certifies that the **PurePak Technology Corporation** packaging referenced above has passed the standards of the DEPARTMENT OF TRANSPORTATION'S TITLE 49 CFR; Performance Oriented Packaging Standards, Section 178. This package is also certified under IMDG, ICAO/IATA Regulations and the UN Recommendations on the Transport of Dangerous Goods. It is the responsibility of the end user to determine authorization for use under these regulations. The use of other packaging methods or components other than those documented in this report may render this certification invalid.

SUMMARY OF PERFORMANCE TESTS					
UN / DOT TEST	CFR REFERENCE	TEST LEVEL	TEST CONTENTS	TEST COMPLETED	TEST RESULTS
Drop	178.603	1.9 m	Methanol/Water Solution	August 28, 2020	PASS
Stacking	178.606	113.4 Kg – 24 Hours	Empty	August 26, 2020	PASS
Pressure	173.27	300 kPa - 30 Minutes	Water	August 31, 2020	PASS
Vibration	178.608	3.3 Hz – 1 Hour	Water	September 2, 2020	PASS
Cobb	178.516	30 Minutes	---	August 25, 2020	PASS
TEST REPORT NUMBERS:			20-CA20150, 16-CA20163		
UN MARKING: (CFR 49 – 178.503)			 4G / Y7.5 / S / ** USA / +CC7197		
PACKAGING IDENTIFICATION CODE:			4G - Fiberboard Box (178.516)		
PERFORMANCE STANDARD:			Y (Packaging meets Packing Group II and III tests)		
AUTHORIZED GROSS MASS:			7.5 Kg (16.5 Lbs.)		
"S" DESIGNATION:			Denotes Inner Packagings		
YEAR OF MANUFACTURE:			** Insert year the packaging is manufactured		
STATE AUTHORIZING THE MARK:			USA		
PACKAGING CERTIFICATION AGENCY:			(+CC) TEN-E Packaging Services, Inc. (Ontario, CA CAA #2006030021)		
THIRD PARTY PACKAGING IDENTIFICATION:			+CC7197		
PERIODIC RETEST DATE:			September 2, 2022		
SP NUMBER:			DOT SP-14656		

ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY THAT THE PACKAGING TESTED IS MERCHANTABLE OR FIT FOR A PARTICULAR PURPOSE, ARE DISCLAIMED. In no event shall TEN-E Packaging Services, Inc. liability exceed the total amount paid by **PurePak Technology Corporation** for services rendered. In the event of future changes to the above referenced test standards, it is the responsibility of **PurePak Technology Corporation** to determine whether additional testing or updating of past testing is necessary to verify that the packaging we have tested remains in compliance with those standards.

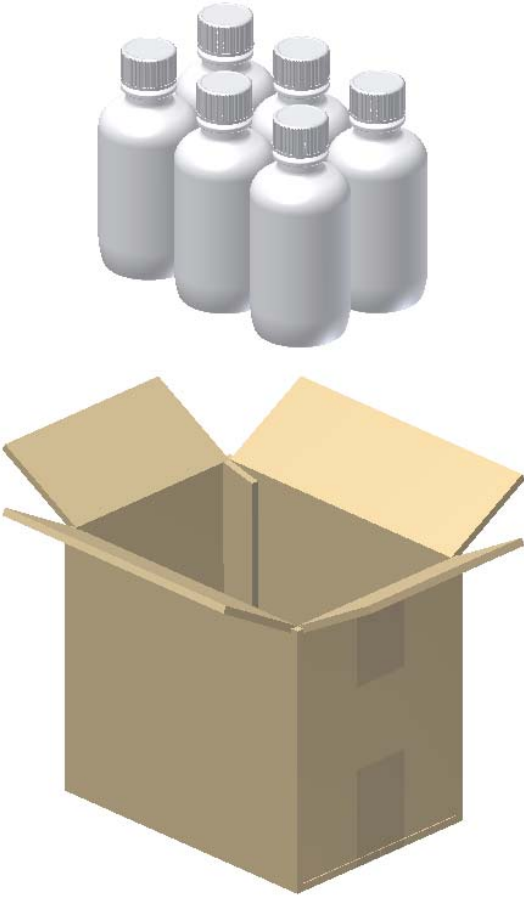
MANUFACTURER:

PurePak Technology Corporation
 324 South Bracken Lane Suite 3
 Chandler, AZ 85224



Matthew C. Anderson
 Project Manager
 TEN-E Packaging Services, Inc.
 326 North Corona Avenue

SECTIONS II & V: PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS

6 x 500 mL Round Plastic Bottle Packaging With 38-439 Neck Finish	
ASSEMBLY DRAWING	TEST LEVELS
	Certification Type: Periodic Retest
	Packaging Code Designation: 4G
	Packing Group: II
	Specific Gravity: 1.9
	Internal Pressure: 300 kPa
	TEST SAMPLE PREPARATION (Refer to Section IV)
	Overall Packaging Tare Weight: 642.0 Grams
	Fill Capacity (98% Maximum Capacity):
	Methanol/Water Solution 582.3 Grams
	Water 604.7 Grams
	Package Test Weight:
	Methanol/Water Solution 4.1 Kg 9.0 Lbs.
	Water 4.2 Kg 9.2 Lbs.
	Authorized Package Gross Mass: 7.5 Kg 16.5 Lbs.
	CLOSING METHODS – INNER PACKAGING
	Application Torque: 50 In-Lbs
	Equipment: KAPS All Electronic Torque Tester
	CLOSING METHODS – SHIPPER
	Top Flaps:
	Manufacturer: 3M, St. Paul, MN
	Type: 3M #34508 Pressure Sensitive Tape
	Width: 48 mm (2")
	Overlap: 2" Minimum
	Tape Pattern: Center Seam
	Bottom Flaps:
	Manufacturer: 3M, St. Paul, MN
	Type: 3M #34508 Pressure Sensitive Tape
	Width: 48 mm (2")
	Overlap: 2" Minimum
	Tape Pattern: Center Seam

For Packagings with an Established Gross Mass:

If the gross mass calculation in this report exceeds the previously established gross mass, the manufacturer may elect to maintain the current gross mass marking (e.g. the gross mass rating of the UN marking on the packaging may be less than the calculated gross mass indicated in this report) or use the newly established gross mass. In no event shall the gross mass marking on the packaging exceed the gross mass to which the packaging was tested.

6 x 500 mL Round Plastic Bottle Packaging With 45mm Neck Finish

ASSEMBLY DRAWING



TEST LEVELS

Certification Type:	Periodic Retest
Packaging Code Designation:	4G
Packing Group:	II
Specific Gravity:	1.9
Internal Pressure:	300 kPa

TEST SAMPLE PREPARATION (Refer to Section IV)

Overall Packaging Tare Weight:	645.0 Grams
Fill Capacity (98% Maximum Capacity):	
Methanol/Water Solution	598.3 Grams
Water	621.4 Grams
Package Test Weight:	
Methanol/Water Solution	4.2 Kg 9.2 Lbs.
Water	4.3 Kg 9.4 Lbs.
Authorized Package Gross Mass:	7.7 Kg 16.9 Lbs.

CLOSING METHODS – INNER PACKAGING

Application Torque:	25 In-Lbs
Equipment:	Kaps All Electronic Torque Tester

CLOSING METHODS – SHIPPER

Top Flaps:

Manufacturer:	3M, St. Paul, MN
Type:	3M #34508 Pressure Sensitive Tape
Width:	48 mm (2")
Overlap:	2" Minimum
Tape Pattern:	Center Seam


Bottom Flaps:


Manufacturer:	3M, St. Paul, MN
Type:	3M #34508 Pressure Sensitive Tape
Width:	48 mm (2")
Overlap:	2" Minimum
Tape Pattern:	Center Seam

For Packagings with an Established Gross Mass:

If the gross mass calculation in this report exceeds the previously established gross mass, the manufacturer may elect to maintain the current gross mass marking (e.g. the gross mass rating of the UN marking on the packaging may be less than the calculated gross mass indicated in this report) or use the newly established gross mass. In no event shall the gross mass marking on the packaging exceed the gross mass to which the packaging was tested.

COMPONENT INFORMATION







CLOSURE (QIM-317-4937 Rev A)		DRAWING
Manufacturer: Berry Plastics, Evansville, IN		
Description:	38mm Threaded Closure	
Quantity:	6	
Material:	Polypropylene	
Tare Weight:	10.27 Grams	
Overall Dimensions:		
• Height	1.015'	
• Diameter	1.692"	
Thread:		
• Type	38mm	
• Style	439	
Finish Dimensions:		
• T	1.491"	
• E	1.386"	
Markings (QC Audit):	58A	
Liner:		
Description:	Polyethylene Foam Liner	
Tare Weight:	0.65 Grams	
Thickness:	0.055"	
Diameter:	1.392"	
PLASTIC BOTTLE (1046059)		
Manufacturer: PurePak Technology, Chandler, AZ		
Description:	500mL Plastic Bottle	
Quantity:	6	
Material:	High Density Polyethylene	
Method of Manufacture:	Blow Molded	
Tare Weight:	Grams	
Capacity:		
• Rated	500mL	
• Overflow	617.0 Grams (20.8 Oz)	
Overall Dimensions:		
• Height	7.017"	
• Diameter	3.081"	
Thread Dimensions:		
• T	1.455"	
• E	1.355"	
• Pitch	0.1640"	
Wall Thickness:		
• Minimum	0.027"	
Markings (QC Audit):	2 10/14 SPI "2" HDPE Recycling Symbol	

CLOSURE (4.1451.99.2)		DRAWING
Manufacturer: George MENSHEN GmbH, Finnentrop, Germany		
Description:	45mm Threaded Closure	
Quantity:	6	
Material:	Polyethylene	
Tare Weight:	11.07 Grams	
Overall Dimensions:		
• Height	1.238"	
• Diameter	1.992"	
Thread:		
• Type	45mm	
• Style	Buttress	
Finish Dimensions:		
• T	1.766"	
• E	1.682"	
• Thread Pitch	4mm	
Markings (QC Audit):	None	
Liner:		
Description:	PTFE Liner	
Tare Weight:	0.91 Grams	
Thickness:	0.008"	
Diameter:	1.793"	
PLASTIC BOTTLE (1046096)		
Manufacturer: PurePak Technology, Chandler, AZ		
Description:	500mL Plastic Bottle	
Quantity:	6	
Material:	High Density Polyethylene	
Method of Manufacture:	Blow Molded	
Tare Weight:	51.0 Grams	
Capacity:		
• Rated	500mL	
• Overflow	634.0 Grams (21.4 Oz)	
Overall Dimensions:		
• Height	6.976"	
• Diameter	3.091"	
Thread Dimensions:		
• T	1.775"	
• E	1.646"	
• Pitch	0.1587"	
Wall Thickness:		
• Minimum	0.025"	
Markings (QC Audit):	SPI "2" HDPE Recycling Symbol	

SHIPPER		
Manufacturer: Smurfit Kappa, Phoenix, AZ		
Description:	Regular Slotted Container	
Material/Flute (Inner to Outer):	Double Wall Natural Kraft Corrugated Fiberboard; B/C-Flute	
Basis Weight (Outer to Inner) Lbs./MSF:		
• Specification	42 / 23 / 33 / 23 / 35	
Tare Weight:	268.0 Grams	
DIMENSIONS		
	Specification Dimensions (Inside)	Measured Dimensions (Outside)
• Length	9-3/8"	9-7/8"
• Width	6-5/16"	7"
• Height	7-1/8"	8-1/2"
Board Caliper (Nominal):	0.216"	
Manufacturer's Joint:	Inside Glued, 1-3/8" Lap	
Markings (QC Audit):	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; margin-right: 10px;">u n</div> <div> 4G/Y7.5/S/18 USA/+CC7197 DOT-SP 14656 ART WORK DATE 2-20-18 9 3/8 X 6 5/16 X 7 1/8 ID PACKAGING LLC </div> </div>	
BOX CERTIFICATE		
(A) Corrugated Manufacturer:	SMURFIT KAPPA	
(B) Structure:	Double Wall	
(C) Bursting Test	275 Lbs. Per Sq. Inch	
(D) Min comb Wt. Facings:	110 Lbs. Per M Sq. Ft	
(E) Size Limit:	95"	
(F) Gross Wt. Lt:	100 Lbs.	
(G) Location:	PHOENIX, AZ0	

SECTION III: TEST PROCEDURES AND RESULTS

DROP TESTS 38-439 Neck Finish







TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Methanol/Water Solution (0.963 SG)	<ul style="list-style-type: none">For packaging containing liquid, each packaging does not leak.There can be no damage to the outer packaging likely to adversely affect safety during transport. Inner receptacles, inner packagings or articles must remain completely within the outer packaging and there must be no leakage of the filling substance from the inner packaging.Any discharge from a closure is slight and ceases immediately after impact with no further leakage. (§178.603)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	-18°C (0°F) Freezer #W201	
CONTENTS TEMP.:	-18.3°C (-1.0°F)	
DROP HEIGHT:	1.9 Meters (75.0") (Refer to Section IV)	
TEST EQUIPMENT:	L.A.B. Accu Drop 160	
DROP ORIENTATIONS AND TEST RESULTS		
Sample #1: Flat on Bottom	Sample #2: Flat on Top	*Sample #3: Flat on Long Side
		
PASS: No leakage or damage.	PASS: No leakage or damage.	PASS: No leakage or damage.
*Sample #4: Flat on Short Side	*Sample #5: Bottom Corner	**Sample #1: Top Corner
		
PASS: No leakage or damage.	PASS: No leakage. Deformation to shipper on impact corner.	PASS: No leakage. Deformation to shipper on impact corner.

*Side and corner drops were conducted to impact the manufacturer's joint.

**Flat on bottom drop sample was also used for the top corner drop.

DROP TESTS

45mm Neck Finish

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Methanol/Water Solution (0.963 SG)	<ul style="list-style-type: none">For packaging containing liquid, each packaging does not leak.There can be no damage to the outer packaging likely to adversely affect safety during transport. Inner receptacles, inner packagings or articles must remain completely within the outer packaging and there must be no leakage of the filling substance from the inner packaging.Any discharge from a closure is slight and ceases immediately after impact with no further leakage. (§178.603)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	-18°C (0°F) Freezer #W201	
CONTENTS TEMP.:	-18.3°C (-1.0°F)	
DROP HEIGHT:	1.9 Meters (75.0") (Refer to Section IV)	
TEST EQUIPMENT:	L.A.B. Accu Drop 160	
DROP ORIENTATIONS AND TEST RESULTS		
Sample #12: Flat on Bottom	Sample #13: Flat on Top	*Sample #14: Flat on Long Side
		
PASS: No leakage or damage.	PASS: No leakage or damage.	PASS: No leakage or damage.
*Sample #15: Flat on Short Side	*Sample #16: Bottom Corner	**Sample #12: Top Corner
		
PASS: No leakage or damage.	PASS: No leakage. Deformation to shipper on impact corner.	PASS: No leakage. Deformation to shipper on impact corner.


*Side and corner drops were conducted to impact the manufacturer's joint.

**Flat on bottom drop sample was also used for the top corner drop.

STACKING TEST

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Empty	<ul style="list-style-type: none"> There can be no deterioration that could adversely affect transport safety or any distortion liable to reduce the package's strength, cause instability in stacks of packages, or cause damage to inner packagings that is likely to reduce safety in transport. <p>(§178.606)</p>
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST LOAD APPLIED:	113.4 Kg (250.0 Lbs.) (Refer to Section IV)	
TEST DURATION:	24 Hours	
TEST EQUIPMENT:	Dead Load Weights	

STACKING TEST SET-UP & RESULTS

	Sample #	Maximum Deflection After 24 Hours	Results
	6	0"	PASS
	7	0"	PASS
	8	0"	PASS
Comments/Observations: Following the 24-hour stack test, there was no no damage likely to affect the performance of the packaging.			

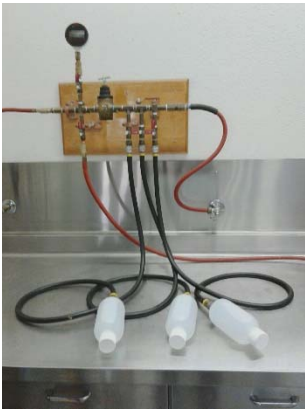
Stacking Stability: Not conducted; required only for guided load tests.

PRESSURE DIFFERENTIAL TEST

38-439 Neck Finish

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	<ul style="list-style-type: none"> Packaging for which retention of liquid is a basic function must be capable of withstanding the pressure requirements without leakage. (§173.27(c))
FILL CAPACITY:	Maximum Capacity	
CLOSURE APPLICATION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST PRESSURE:	300 kPa	
TEST DURATION:	30 Minutes	
AREA OF PRESSURIZATION:	Through the Bottom	
TEST EQUIPMENT:	Regulated Water Source Digital Pressure Gauge #: 605	

HYDROSTATIC PRESSURE TEST SET-UP AND RESULTS

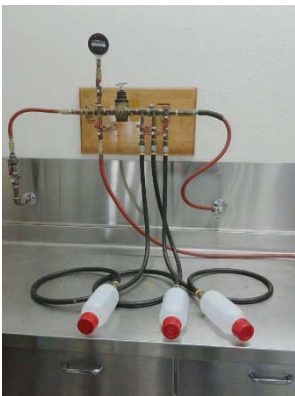
	Sample #	Results	Comments/Observations
	1	PASS	All three samples maintained the 300 kPa test pressure for 30 minutes without leakage.
	2	PASS	
	3	PASS	

PRESSURE DIFFERENTIAL TEST

45mm Neck Finish

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	<ul style="list-style-type: none"> Packaging for which retention of liquid is a basic function must be capable of withstanding the pressure requirements without leakage. (§173.27(c))
FILL CAPACITY:	Maximum Capacity	
CLOSURE APPLICATION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST PRESSURE:	300 kPa	
TEST DURATION:	30 Minutes	
AREA OF PRESSURIZATION:	Through the Bottom	
TEST EQUIPMENT:	Regulated Water Source Digital Pressure Gauge #: 605	

HYDROSTATIC PRESSURE TEST SET-UP AND RESULTS


	Sample #	Results	Comments/Observations
	1	PASS	All three samples maintained the 300 kPa test pressure for 30 minutes without leakage.
	2	PASS	
	3	PASS	

VIBRATION TEST

38-439 Neck Finish

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	<ul style="list-style-type: none"> Immediately following the period of vibration, each package must be removed from the platform, turned on its side and observed for any evidence of leakage. A packaging passes the vibration test if there is no rupture or leakage from any of the packages. No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength. (§178.608)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
TABLE DISPLACEMENT:	1"	
TEST FREQUENCY:	3.3 Hz	
TEST DURATION:	1 Hour	
TEST EQUIPMENT:	Vertical motion using L.A.B. Palletizer Vibration System	


VIBRATION TEST SET-UP AND RESULTS

	Sample #	Results	Comments/Observations
	9	PASS	No leakage or damage.
	10	PASS	
	11	PASS	

VIBRATION TEST 45mm Neck Finish

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	<ul style="list-style-type: none"> Immediately following the period of vibration, each package must be removed from the platform, turned on its side and observed for any evidence of leakage. A packaging passes the vibration test if there is no rupture or leakage from any of the packages. No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength. (§178.608)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
TABLE DISPLACEMENT:	1"	
TEST FREQUENCY:	3.3 Hz	
TEST DURATION:	1 Hour	
TEST EQUIPMENT:	Vertical motion using L.A.B. Palletizer Vibration System	

VIBRATION TEST SET-UP AND RESULTS

	Sample #	Results	Comments/Observations
	17	PASS	No leakage or damage.
	18	PASS	
	19	PASS	

COBB WATER ABSORPTION TEST

TEST INFORMATION	TEST CRITERIA
NUMBER OF SAMPLES: 5 SAMPLE SIZE: 5" x 5" (Minimum) CONDITIONING: 73°F / 50% RH Quality Room #W202 WATER APPLIED: 100 mL / Sample TEST DURATION: 30 Minutes / Sample TEST EQUIPMENT: UWE Analytical Balance Gurley Cobb Water Absorption Fixtures	<ul style="list-style-type: none"> An increase in mass greater than 155 g/m² over the 30 minute duration represents an unacceptable level of water resistance. (§178.516)

COBB WATER ABSORPTION TEST RESULTS	
Sample #	Water Absorbed
1	108.0 g/m ²
2	117.0 g/m ²
3	103.0 g/m ²
4	105.0 g/m ²
5	102.0 g/m ²
AVERAGE:	107.0 g/m²
RESULT	PASS

REGULATORY AND INDUSTRY STANDARD REFERENCES

REGULATORY REFERENCES

TEST	49 CFR ^①	UN ^②	IMDG ^③	ICAO ^④	IATA ^⑤
	October 2019 Edition	20 th Edition	2018 Edition	2019-2020 Edition	61st Edition
Drop:	178.603	6.1.5.3	6.1.5.3	6; 4.3	6.3.3
Stacking:	178.606	6.1.5.6	6.1.5.6	6; 4.6	6.3.6
Pressure:	173.27(c)	4.1.1.4.1	---	4; 1.1.6	5.0.2.9
Vibration:	178.608	---	---	4; 1.1.1 & 4; 1.1.4	5.0.2.7
Cobb:	178.516(b)(1)	6.1.4.12.1	6.1.4.12.1	6; 3.1.11.1	6.2.12.2

① United States Department of Transportation Code of Federal Regulations (CFR) Title 49, Transportation, Parts 100-185

② The United Nations Recommendations on the Transport of Dangerous Goods – Model Regulations (UN – Orange Book)

③ International Maritime Dangerous Goods Code (IMDG)

④ Technical Instructions for the Safe Transport of Dangerous Goods by Air (ICAO)

⑤ International Air Transport Association (IATA) Dangerous Goods Regulations

INDUSTRY STANDARD REFERENCES

Drop:	ASTM ^⑥ D5276:	Standard Test Method for Drop Test of Loaded Containers by Free Fall
	ASTM ^⑥ D7790	Standard Test Method for the Preparation of Plastic Packagings Containing Liquids for United Nations (UN) Drop Testing
	ISO ^⑦ 2248:	Packaging – Complete, Filled Transport Packages – Vertical Impact Test by Dropping
Stacking:	ASTM ^⑥ D4577:	Standard Test Method for Compression Resistance of a Container Under Constant Load
	ISO ^⑦ 2234:	Packaging – Complete, Filled Transport Packages – Stacking Test using Static Load
Hydrostatic Pressure:	ASTM ^⑥ D7660:	Standard Guide for Conducting Internal Pressure Tests on United Nations (UN) Packagings
Vibration:	ASTM ^⑥ D999:	Standard Test Method for Vibration Testing of Shipping Containers
	ISO ^⑦ 2247:	Packaging – Complete, Filled Transport Packages – Vibration Test at Fixed Low Frequency
Cobb:	ISO ^⑦ 535:	Paper and Board – Determination of Water Absorption – Cobb Method

⑥ American Society for Testing and Materials (ASTM)

⑦ International Organization for Standardization (ISO)

EQUIPMENT

All inspection, measuring and test equipment that can affect product quality is calibrated and adjusted at prescribed intervals, or prior to use, and is traceable to NIST, using ANSI Z540 as an overall guide for calibration certification.

SECTION IV: MATHEMATICAL CALCULATIONS

38-439 Neck Finish

INFORMATION USED FOR CALCULATIONS

Overall Packaging Tare Weight (PTW):	642.0 Grams	
Overflow Capacity (OFC):		Methanol/Water
Methanol/Water	594.1 Grams	SG: 0.963
Water	617.0 Grams	
Number of Inner Packagings (# IP):	6	
Packing Group	II	
Product Specific Gravity (PSG):	1.900	
Packing Group Multiplication Factor (MF):	1.00	
Overall Height of one Package (OH):	8.50 Inches	
Stack Test # of Samples Tested Simultaneously:	1	

98% OF OVERFLOW

Overflow Capacity (OFC) x 98%

OFC	x	98%		
594.1	x	98% =	582.3 Grams	Methanol/Water
617.0	x	98% =	604.7 Grams	Water

PACKAGE TEST WEIGHTS

Overall Pkg Tare Weight (PTW) + (98% Overflow Capacity (OFC) x # of Inner Pkg (# IP))

PTW	+	(98% OFC)	x	# IP)	
642.0	+	582.3	x	6	Methanol/Water
642.0	+	604.7	x	6	Water
Methanol/Water:		4.1	Kg	9.0	Lbs.
Water:		4.2	Kg	9.2	Lbs.

AUTHORIZED PACKAGE GROSS MASS CALCULATION (APGM)

Overall Pkg Tare Weight (PTW) + (Product SG (PSG) x 98% Overflow (OFC) x # of Inner Pkg (# IP))

PTW	+	(PSG)	x	98% OFC	x	# IP)
642.0	+	1.9	x	604.7	x	6
		7.5	Kg	16.5	Lbs.	

DROP HEIGHT

Calculation For Product Specific Gravities Exceeding 1.2
Product Specific Gravity (PSG) x Packing Group Multiplication Factor (MF)

PSG	x	MF	Packing Group: II		
1.9	x	1.00			
		1.90	Meter	Required Drop Height	Actual Drop Height
				74.8 Inches	75 Inches

STACKING TEST MINIMUM LOAD CALCULATIONS

Number of Packages in a 3m High Stack (118.2 / Overall Pkg Height (OH) -1)

118.2 / Overall Height of one Pkg (OH) - 1

(118.2	/	OH)	-1	=	# 3m HS
118.2	/	8.50	-1	=	13.0

Stacking Test Load Calculation (Individual Package)

Authorized Pkg Gross Mass (APGM) x # of Pkg in a 3m High Stack (# 3m HS)

APGM	x	# 3m HS			
7.5	x	13.0			
			97.5 Kg	214.9 Lbs.	

45mm Neck Finish

INFORMATION USED FOR CALCULATIONS

Overall Packaging Tare Weight (PTW):	645.0 Grams	
Overflow Capacity (OFC):		Methanol/Water
Methanol/Water	610.5 Grams	SG: 0.963
Water	634.0 Grams	
Number of Inner Packagings (# IP):	6	
Packing Group	II	
Product Specific Gravity (PSG):	1.900	
Packing Group Multiplication Factor (MF):	1.00	
Overall Height of one Package (OH):	8.50 Inches	
Stack Test # of Samples Tested Simultaneously:	1	

98% OF OVERFLOW

Overflow Capacity (OFC) x 98%

OFC	x	98%		
610.5	x	98% =	598.3 Grams	Methanol/Water
634.0	x	98% =	621.4 Grams	Water

PACKAGE TEST WEIGHTS

Overall Pkg Tare Weight (PTW) + (98% Overflow Capacity (OFC) x # of Inner Pkg (# IP))

PTW	+	(98% OFC)	x	# IP)	
645.0	+	598.3	x	6	Methanol/Water
645.0	+	621.4	x	6	Water
Methanol/Water:		4.2	Kg	9.2	Lbs.
Water:		4.3	Kg	9.4	Lbs.

AUTHORIZED PACKAGE GROSS MASS CALCULATION (APGM)

Overall Pkg Tare Weight (PTW) + (Product SG (PSG) x 98% Overflow (OFC) x # of Inner Pkg (# IP))

PTW	+	(PSG	x	98% OFC	x	# IP)
645.0	+	1.9	x	621.4	x	6
		7.7	Kg	16.9	Lbs.	

DROP HEIGHT

Calculation For Product Specific Gravities Exceeding 1.2
Product Specific Gravity (PSG) x Packing Group Multiplication Factor (MF)

PSG	x	MF	Packing Group: II		
1.9	x	1.00			
		1.90	Meter	Required Drop Height	Actual Drop Height
				74.8 Inches	75 Inches

STACKING TEST MINIMUM LOAD CALCULATIONS

Number of Packages in a 3m High Stack (118.2 / Overall Pkg Height (OH) -1)

118.2 / Overall Height of one Pkg (OH) - 1

(118.2	/	OH)	-1	=	# 3m HS
118.2	/	8.50	-1	=	13.0

Stacking Test Load Calculation (Individual Package)

Authorized Pkg Gross Mass (APGM) x # of Pkg in a 3m High Stack (# 3m HS)

APGM	x	# 3m HS			
7.7	x	13.0			
			100.1 Kg	220.7 Lbs.	